




- NOTES:
1. SHEET METAL, ANY TYPE OF STEEL, .040-.080 INCHES THICK, MODELED AS .040 INCHES THICK
 2. USE MINIMUM BEND RADIUS
 3. STITCH WELD DIAGONAL BRACES FILLET WELD ALL AROUND WITH 0.5 IN WELD LENGTH AND 2 IN PITCH IS SUGGESTED, WELDERS DISCRETION OK, RIVETING OK TOO

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES & TOLERANCES ARE AS FOLLOWS X.X: ±0.1000" X.XX: ±0.0100" X.XXX: ±0.0050" X.XXXX: ±0.0001" ANGLES: ±0.5° FINISH: 125 MICRO INCHES BREAK ALL SHARP EDGES & CORNERS .002" MAX			DRAWN	KECK 1 DEPLOYABLE TERTIARY MIRROR			
			C. RATLIFF				
			CHECKED				
			TOOLING AND FIXTURING				
MATERIAL SEE NOTE 1 FINISH NONE			DESIGNED	TITLE			
				SHEET METAL, MIRROR MOUNT B			
			ENGINEER	8/5/15			
MATERIAL SEE NOTE 1 FINISH NONE			C. RATLIFF	QUANTITY	PROJECT CODE	DWG NO	REV
			SW DOCUMENT	2	K1D3DD	KDM8124	A
			FILE		NEXT ASSY		1/2
			Side_Sheetmetal		KDM8118		

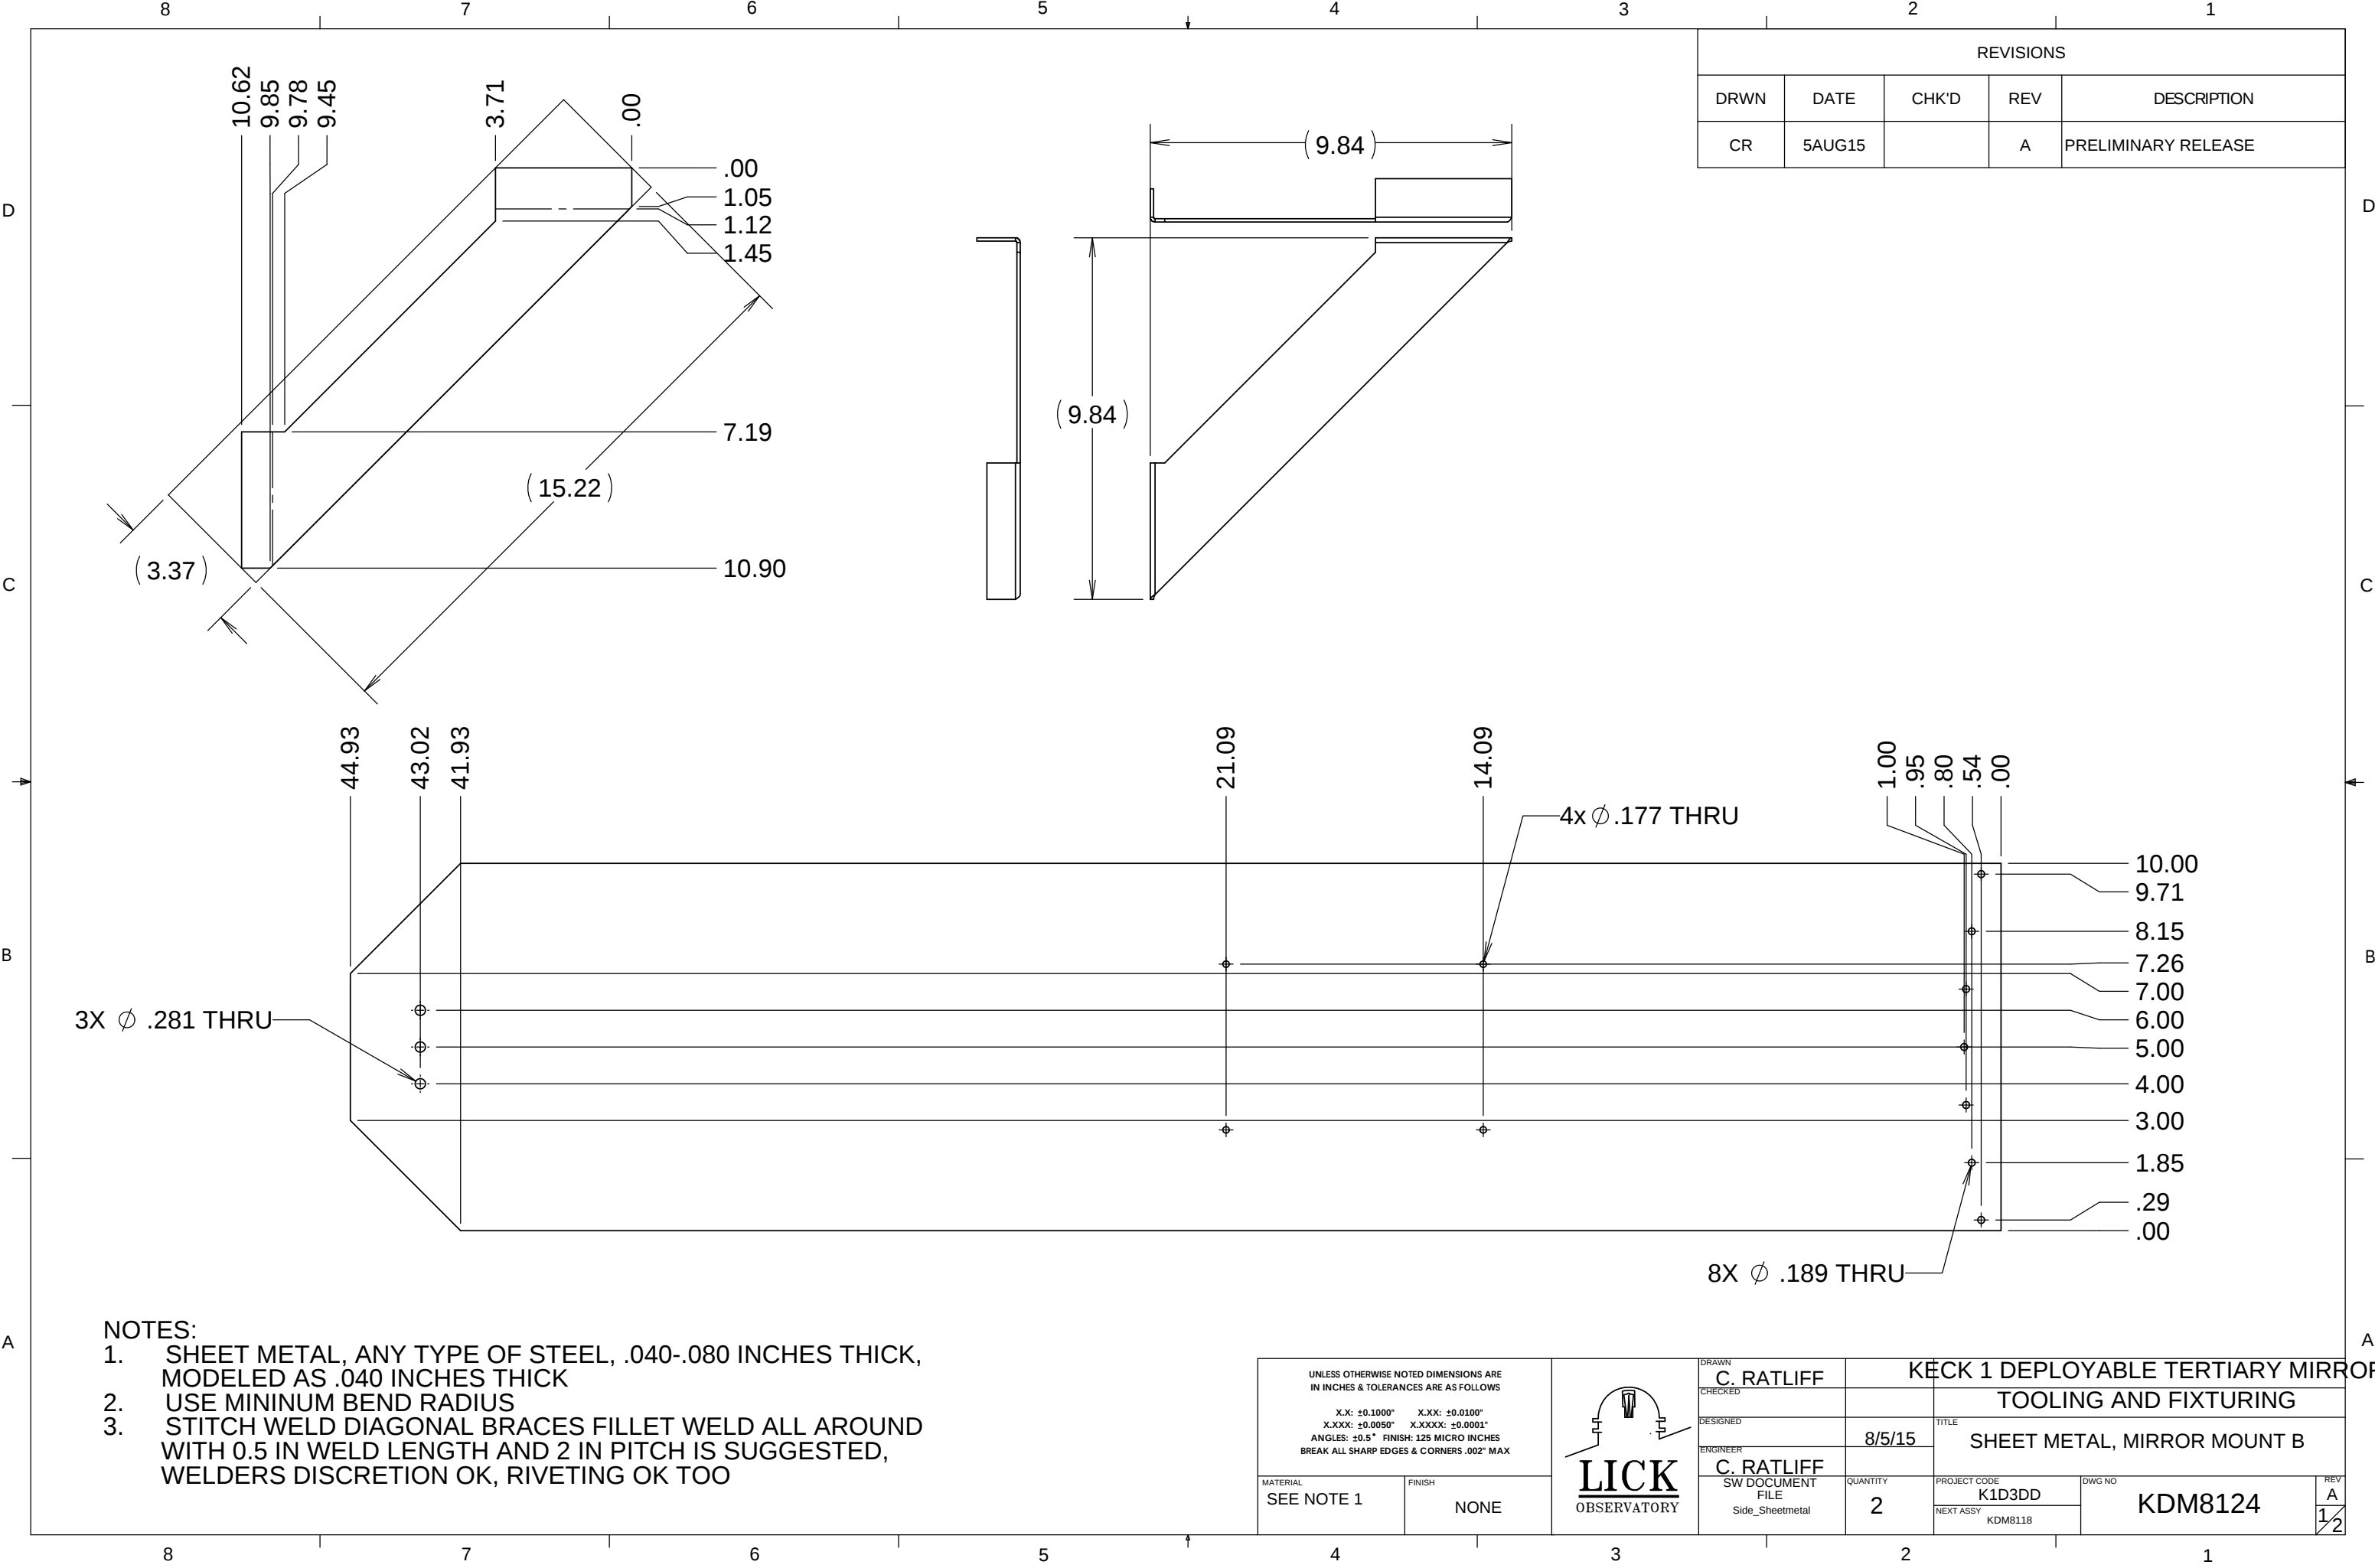