REVISIONS				
REV	DATE	DRWN	CHK'D	DESCRIPTION
A	26NOV14	CR	CR	INITIAL RELEASE
B	1DEC14	CR	CR	MODIFIED OUTER DIAMETER

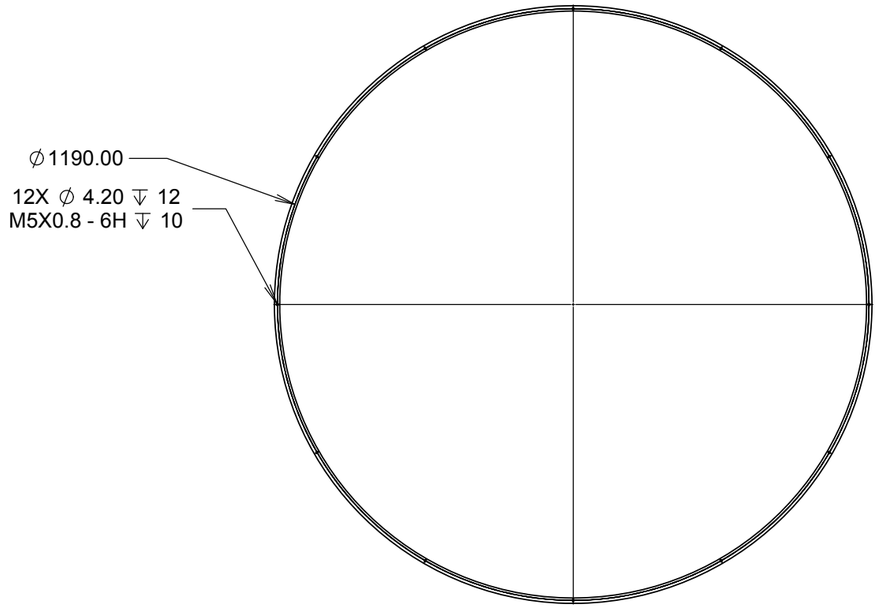





DETAIL F
SCALE 1 : 2

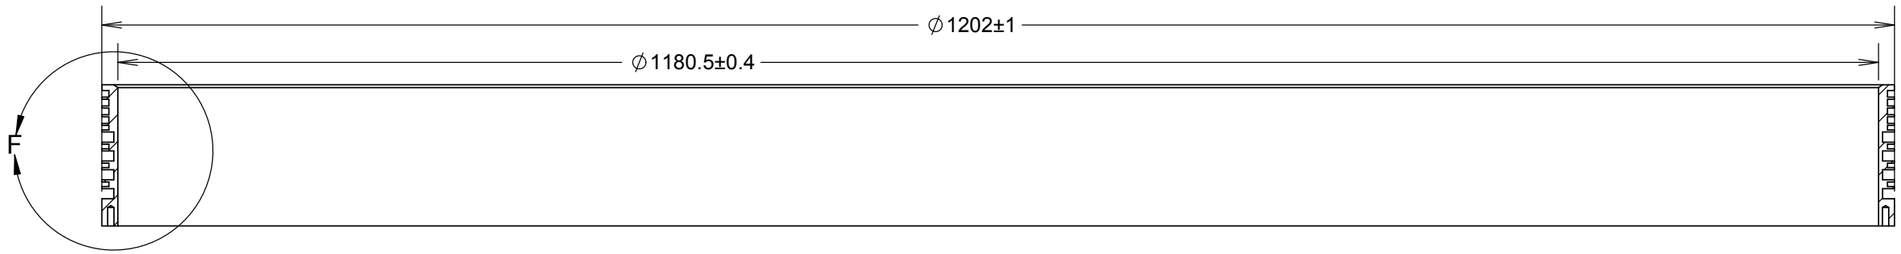

SECTION D-D
SCALE 1 : 4

NOTES

1. WE ARE INTERESTED IN 4 HIGH CURRENT AND 4 SIGNAL RINGS AS SHOWN. WE ARE ALSO INTERESTEDIN A 8 HIGH CURRENT AND 8 SIGNAL RING CONFIGURATION (NOT SHOWN), PLEASE QUOTE BOTH

2. TAPPED FEMALE M5 HOLES FOR FLANGE MOUNT

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN MILLIMETERS & TOLERANCES ARE AS FOLLOWS:
X: ±0.25mm X.X: ±0.10 mm X.XX: ±0.01 mm
ANGLES: ±0.5° FINISH: 3 MICRONS (µm)
BREAK ALL SHARP EDGES & CORNERS .25mm MAX

MATERIAL: TBD
FINISH: TBD

LICK OBSERVATORY

DRAWN: C RATLIFF --
CHECKED: -- --
DESIGNED: -- --
ENGINEER: -- --
SW DOCUMENT FILE
QUANTITY: TBD

KECK 1 DEPLOYABLE TERTIARY MIRROR
MISCELLANEOUS
TITLE: SLIP RING INNER RING
PROJECT CODE: --
NEXT ASS'Y: NEXT ASS'Y
DWG NO: KDM9002
REV: B
1/1