


REVISIONS				
REV	DATE	DRW'N	CHCK'D	DESCRIPTION
A	16APR18	GFC	--	INITIAL RELEASE
B	23APR18	GFC	--	SHEET 3

ITEM	QTY	PartNo	DESCRIPTION
1	1	872-LM8580	SWING-ARM TIP/TILT INTERFACE PLATE
2	3	872-LM8447	STAND OFF, MOCK MIRROR
3	1	872-LM-8404	MOCKUP MIRROR ASSEMBLY
4	12	H/W	WASHER, FLAT, STANDARD, 1/4
5	12	H/W	HEX NUT, 1/4-20
6	3	HW	THREADED ROD, 1/4-20
7	3	HW	THREADED ROD, 1/4-20 X 3-1/2"
8	6	HW	WASHER, FLAT, 5/16 X .732 X .08
9	2	SHOPS	4 KG BRASS WEIGHT
10	1	SHOPS	2 KG BRASS WEIGHT
11	2	HW	SHCS, 1/4-20 X 1/2





DRAWN	CABAK	--	KECK 1 DEPLOYABLE TERTIARY MIRROR
CHECKED	--	--	MISCELLANEOUS
DESIGNED	CABAK	--	TITLE SWING-ARM WITH DUMMY MIRROR ASSY
ENGINEER	CABAK	--	
SW DOCUMENT FILE		PROJECT CODE	DWG NO
1		K1D3FD	872-LM9070
		NEXT ASSY	B 1/3



UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES & TOLERANCES ARE AS FOLLOWS	
X.X: ±0.1000"	X.XX: ±0.0100"
X.XXX: ±0.0050"	X.XXXX: ±0.0001"
ANGLES: ±0.5° FINISH: 125 MICRO INCHES BREAK ALL SHARP EDGES & CORNERS .002" MAX	
MATERIAL	FINISH
PARTS LIST	--

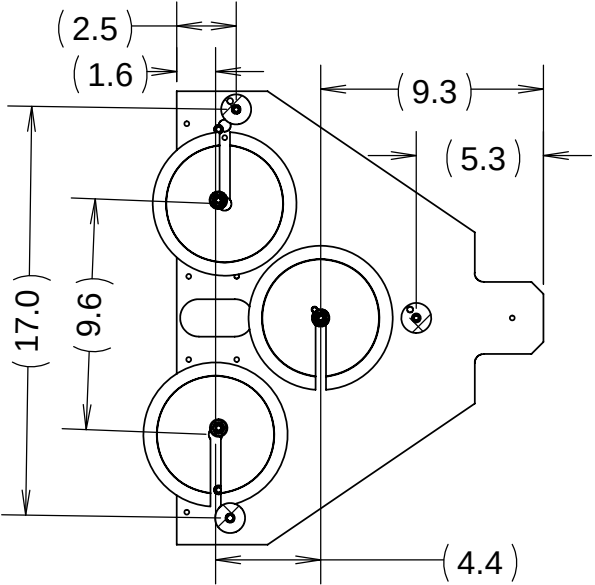


SECTION A-A

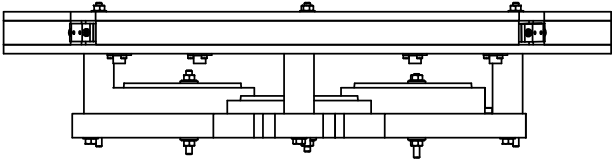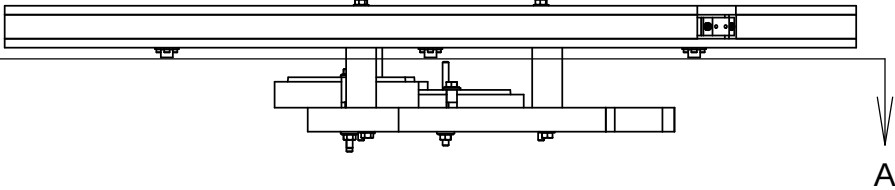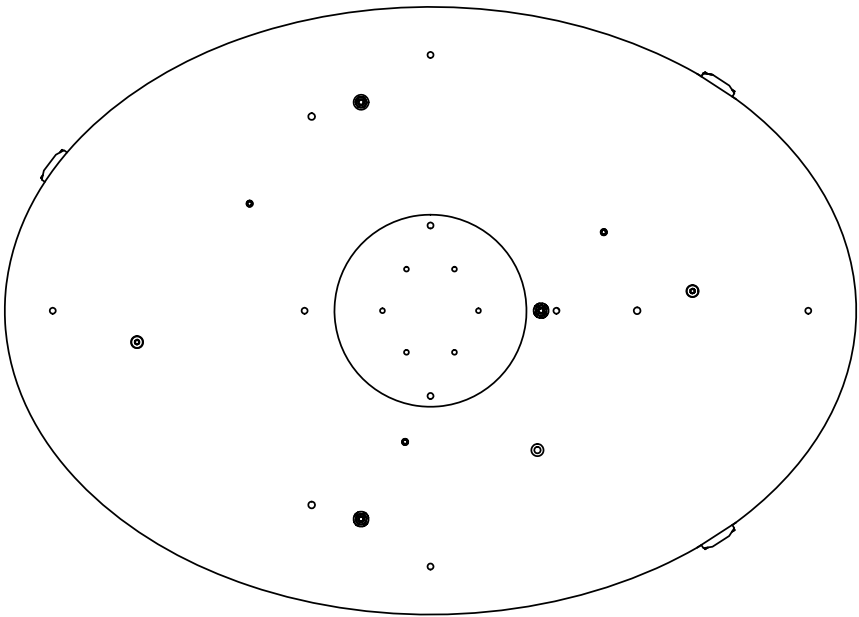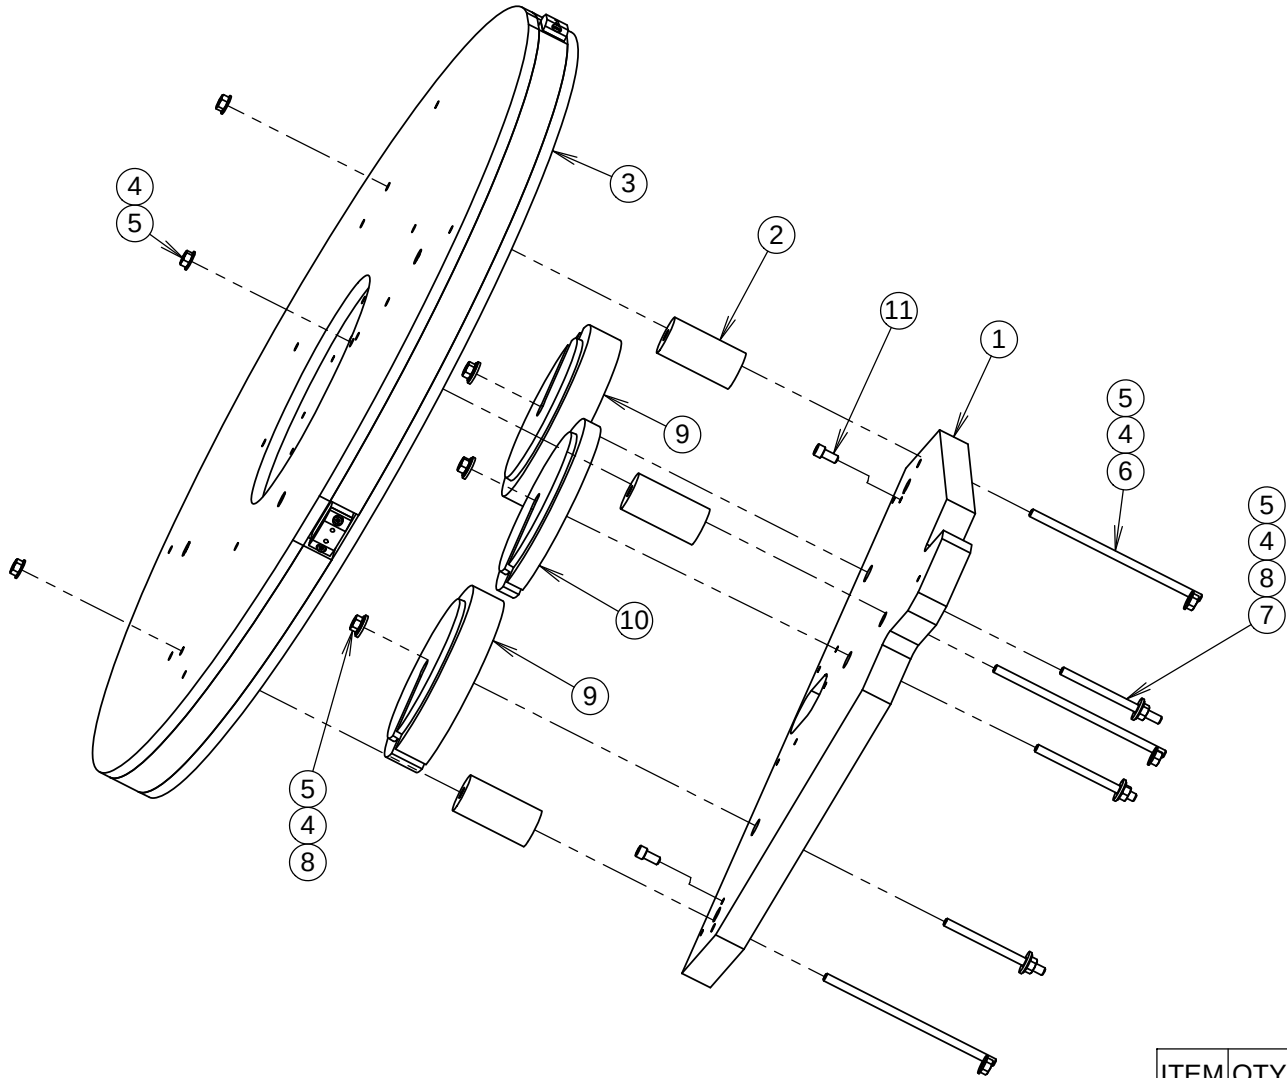

NOTES

- CAD MODEL FILENAME, 872-LM9070 Swingarm-Dummy Assy
- TORQUE ALL FASTENER HW TO 70 IN-LBS

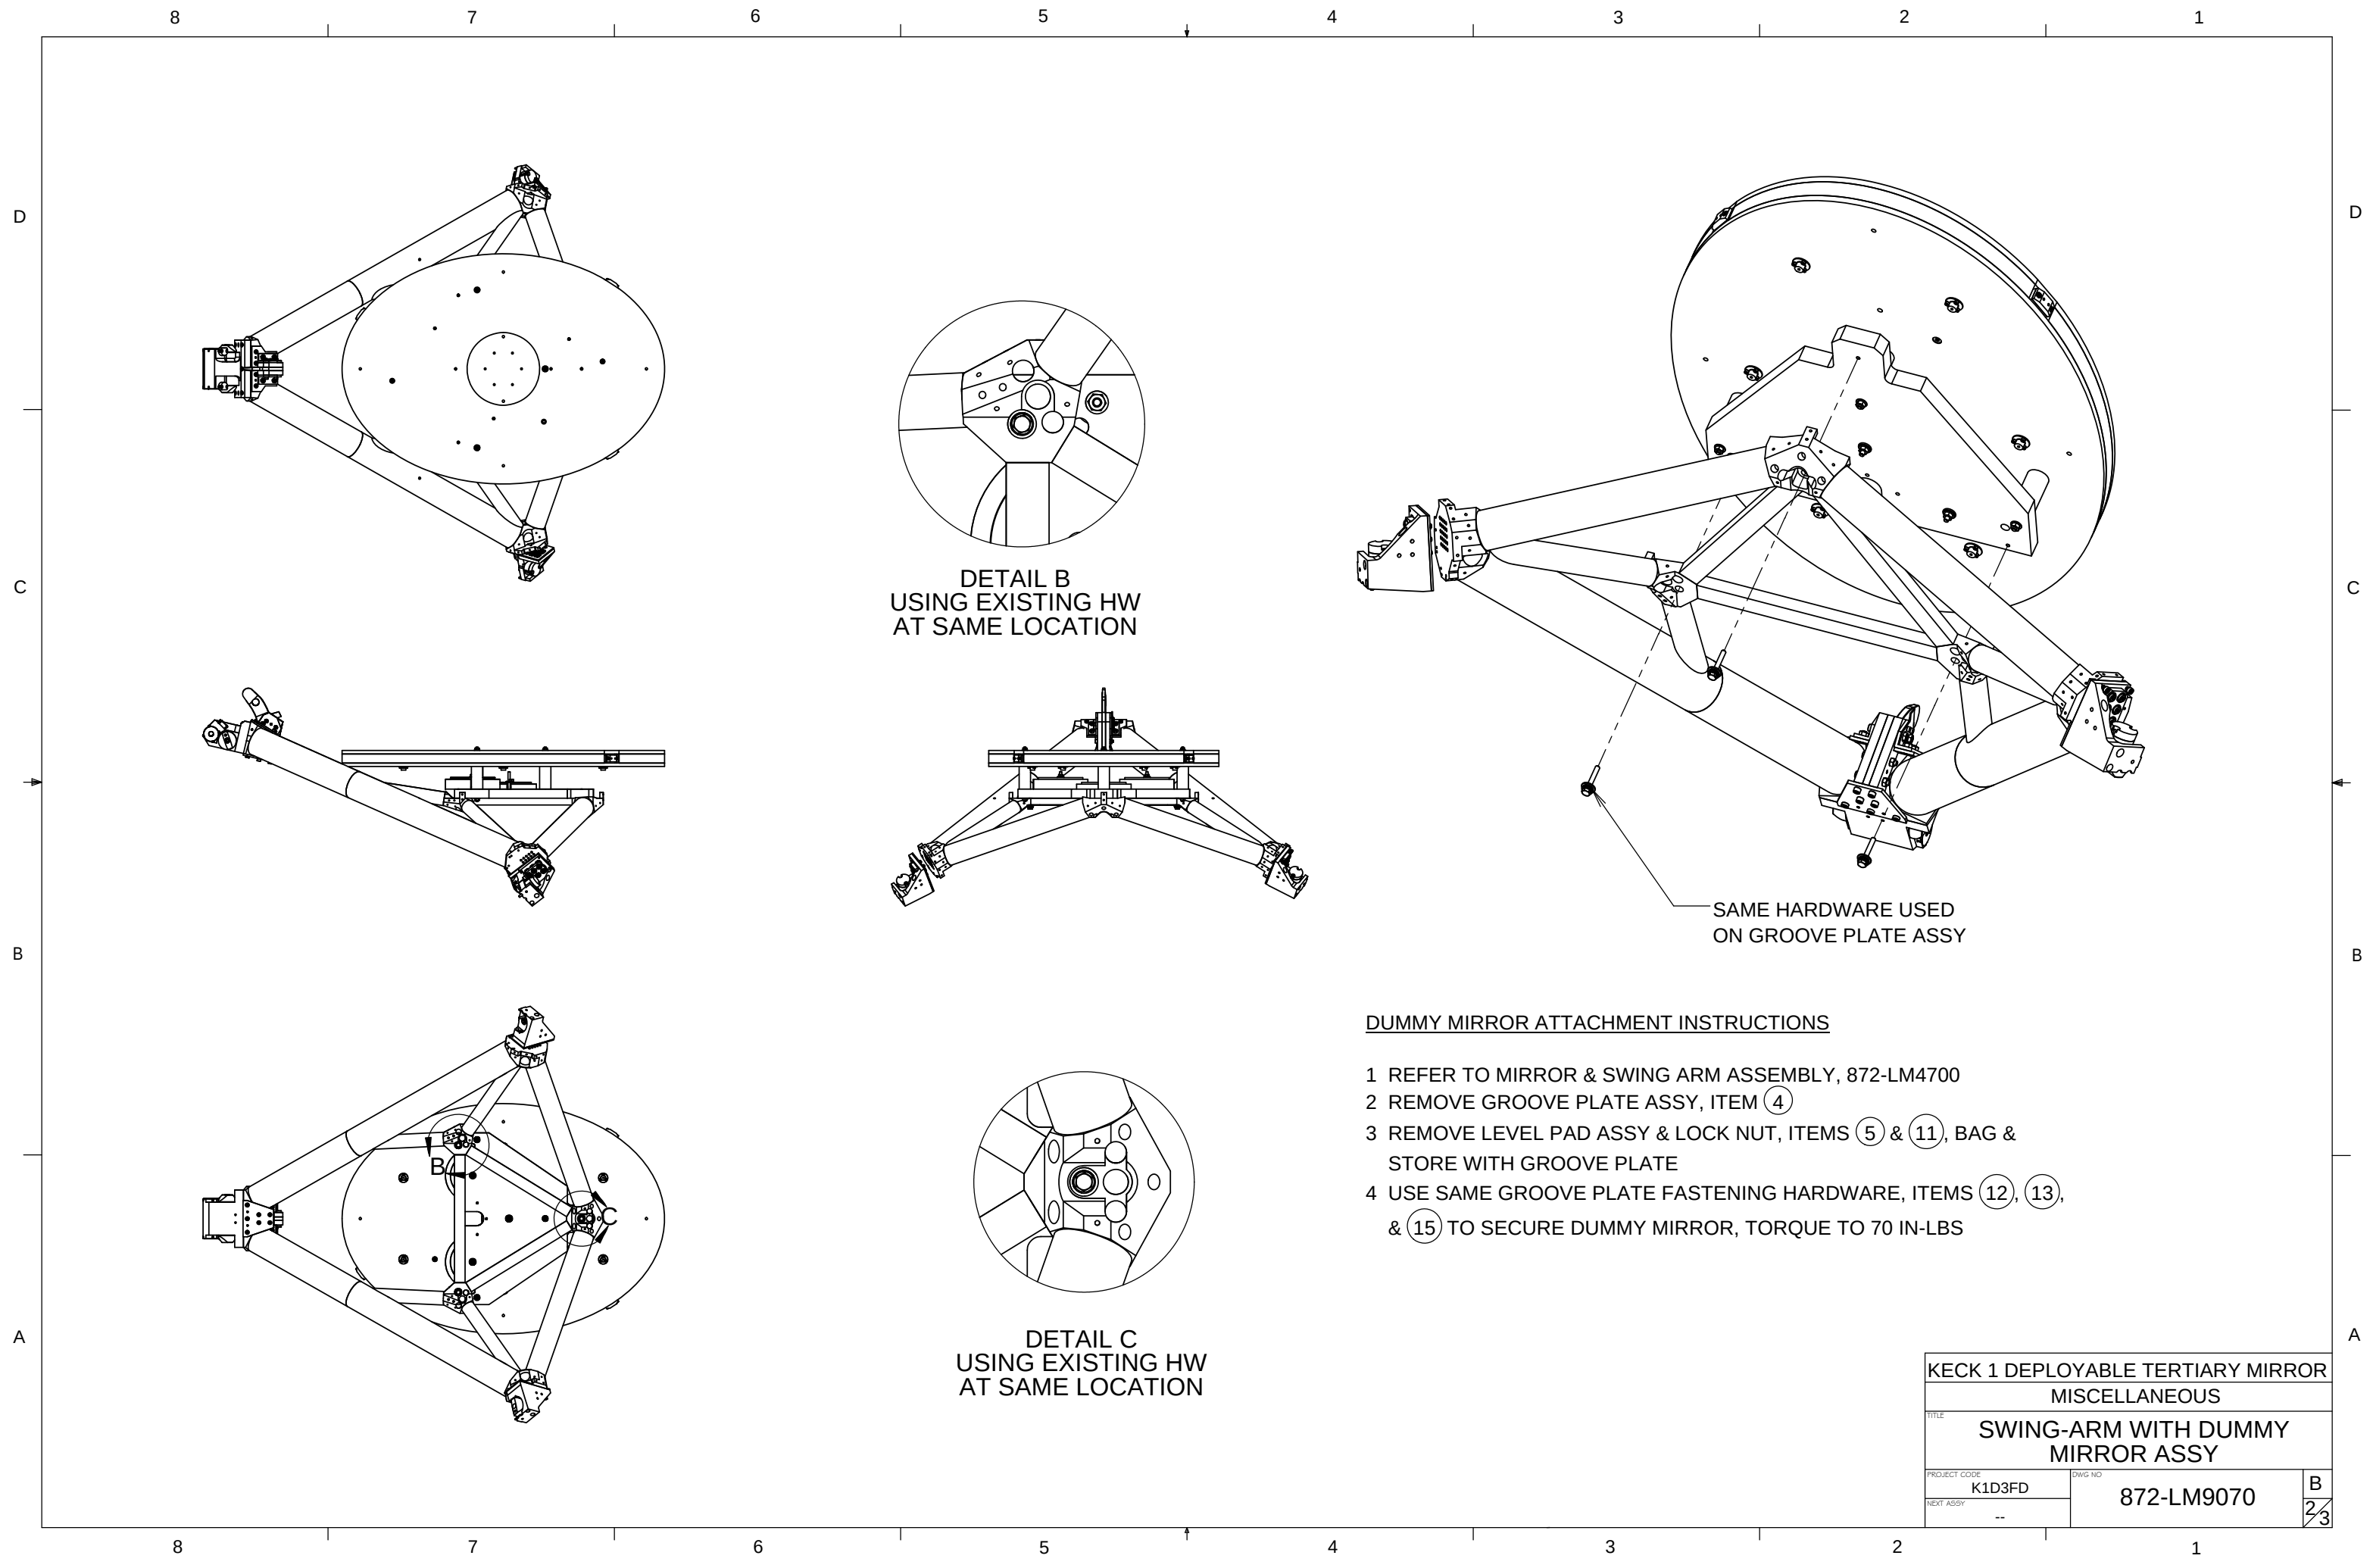

DETAIL B
USING EXISTING HW
AT SAME LOCATION

SAME HARDWARE USED
ON GROOVE PLATE ASSY

DUMMY MIRROR ATTACHMENT INSTRUCTIONS

- 1 REFER TO MIRROR & SWING ARM ASSEMBLY, 872-LM4700
- 2 REMOVE GROOVE PLATE ASSY, ITEM (4)
- 3 REMOVE LEVEL PAD ASSY & LOCK NUT, ITEMS (5) & (11), BAG & STORE WITH GROOVE PLATE
- 4 USE SAME GROOVE PLATE FASTENING HARDWARE, ITEMS (12), (13), & (15) TO SECURE DUMMY MIRROR, TORQUE TO 70 IN-LBS

DETAIL C
USING EXISTING HW
AT SAME LOCATION

KECK 1 DEPLOYABLE TERTIARY MIRROR			
MISCELLANEOUS			
TITLE			
SWING-ARM WITH DUMMY MIRROR ASSY			
PROJECT CODE		DWG NO	
K1D3FD		872-LM9070	
NEXT ASSY		B	
--		2/3	

